

EVWC4L - EVWC4 Wiring center suitable for 4 channels >

TECHNICAL FEATURES


- 4 inputs for conventional room thermostats (ON/OFF type with free voltage output contact);
- 1 input for safety thermostat;
- 1 input for timer;
- Power on indicator;
- Fuse protection (3,15A/T);
- 4 outputs for thermal actuators (the contact rating is depending on the room thermostat);
- DIN-rail mounting (4 modules);
- Storage and transport temperature: $-10^{\circ}\pm 50^{\circ}\text{C}$.


EVWC4 ADDITIONAL FEATURES

- Auxiliary control pump, with selectable instantaneous or delayed (4 minutes) activation;
- Voltage free contact output for auxiliary pump.



- Brochure EVWC

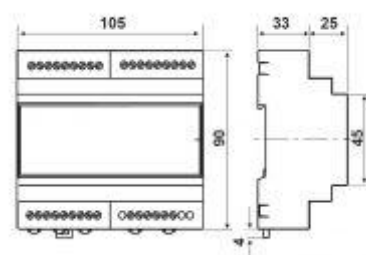

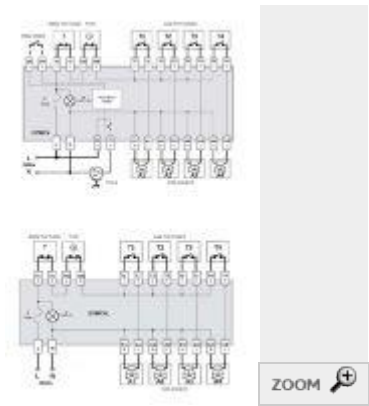

DATASHEET

	Power supply	Max. load	Auxiliary relay pump	Consumption	Protection degree
EVWC4L	230V (24V*)	3A	-	0,2VA	IP20
EVWC4	230V	3A	5 (3) A – 250Vca	2,5VA	IP20